

Albasoft 110

Product Information




Deutsche Baryt-Industrie

Albasoft 110 is manufactured by Deutsche Baryt-Industrie in Bad Lauterberg - in Germany's mountainous Harz region - from selected natural barium sulphate concentrates. By using a special preparation and refining process, this product can replace synthetic barium sulphates even in bright and high gloss applications.

Technical data	Method	Values Albasoft 110
Medium particle size / x50 [μm]	Cilas 920	approx. 1.0
Top-cut / x97 [μm]	Cilas 920	approx. 3.0
Sieve residue at 20 μm [%]	DIN EN ISO 787-7	< 0.05
Humidity at 105°C [%]	DIN EN ISO 3146	< 0.3
BaSO ₄ -content [%]	DIN EN ISO 3262-2	approx. 98
Si-content [%]	DBI-Method	approx. 0.3
Electr. conductivity [$\mu\text{S}/\text{cm}$]	DIN EN ISO 787-14	approx. 50
Lightness Ry / L*	DIN 53163	approx. 93 / 97
pH-Value	DIN EN ISO 787-9	approx. 8
Density [g/cm^3]	DIN EN ISO 787-10	approx. 4.4
Refractive index	Literature	1.64
Hardness [Mohs]	Literature	3.5

The above mentioned values should be taken as indications only and not as guaranteed properties.

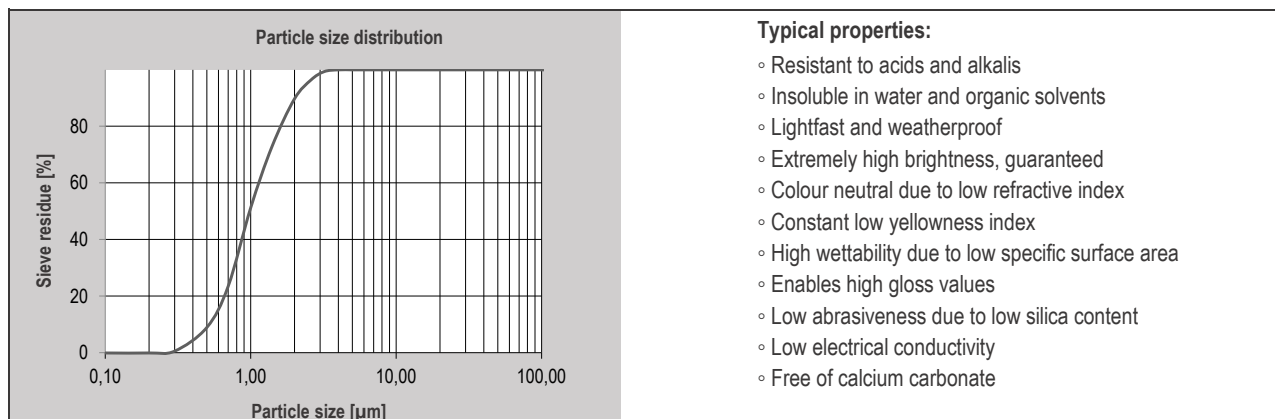

Typical applications:

Extra high quality Top Coats, High quality Powder Coating Systems & Pigment Preparations, Adhesives & Sealants.

Storage:

Keep the product in dry and closed rooms at normal temperature and air humidity, do not pile the pallets.

To achieve best possible results, we recommend storage under the conditions stated above and usage within 12 months after receipt (FIFO).

AS110_12_2020_SM

Producer:

Deutsche Baryt-Industrie
Bahnhofstr. 21 - 39
D-37431 Bad Lauterberg

Phone: +49 5524 8501-0, Fax -33
Mail: info@baryt.com
Internet: www.baryt.com

Ein Unternehmen der

SACHTLEBEN MINERALS